


# TWIN TWIST, FLOOR MODEL PRESSURIZED SOFT SERVE FREEZER

238R



- High capacity, hard-working, space-saving floor unit guarantees years of dependable service.
- Special calibrated electronic thermistor ensures optimum product quality and quick response during peak draw periods.
- Standard night switches provide refrigerated overnight mix storage, saving both labor and energy.
- Self-sharpening, nonmetallic auger flights for reliable service.
- Optional remote mix pump permits use of large capacity mix containers, keeping mix handling to a minimum.
- Perfect for high volume operations such as fast food locations, drive-ins, theme parks, institutions, and recreational facilities.
- Remote air-cooled condenser optional.



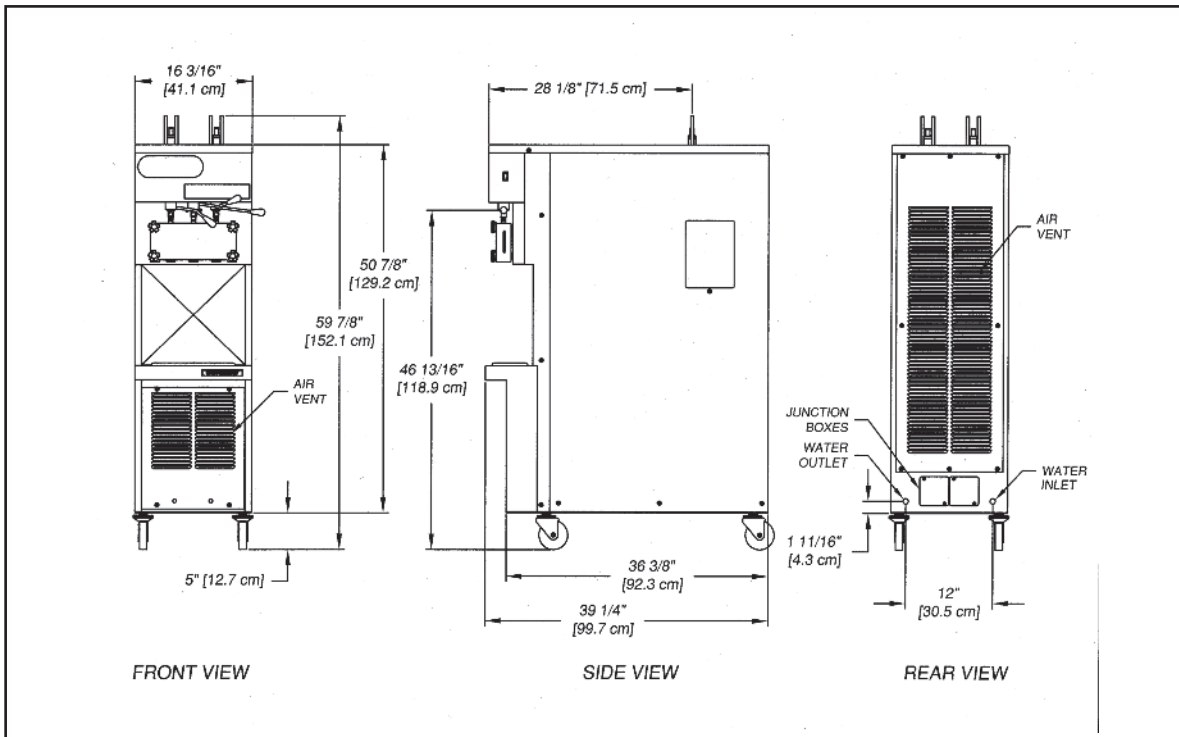

Model 238R			
<b>Dimensions</b>	<b>Machine</b>	<b>with crate</b>	
	width	16" (40,6 cm)	25" (63,5 cm)
	height	60-3/4" (154,3 cm)	67" (170,2 cm)
depth	39-1/4" (99,7 cm)	51" (129,5 cm)	
<b>Weight</b>	560 lbs (254,0 kg)	675 lbs (306,1 kg)	
* <b>Electrical</b> circuit ampacity overcurrent protection device	<b>1 Phase, 208-240 VAC, 60Hz</b>	<b>3 Phase, 208-240 VAC, 60Hz</b>	
	25A minimum	18A minimum	
	35A maximum	25A maximum	
<b>Compressor</b>	Two - 14,000 Btu/hr		
<b>Drive Motor</b>	Two - 2 hp		
<b>Plumbing Fittings</b>	Water cooled units require 1/2" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F. Air cooled remote is available.		
<b>Freezing Cylinder Volume</b>	Two - 1.33 gallon (5,3 liters)		

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

\* Machine requires a dedicated electrical circuit.

Distributed by:



FOODSERVICE EQUIPMENT  
502 Highway 67 • Kiel, WI 53042-1600  
920-894-2293 • 800-558-5807  
Fax: 920-894-7029  
E-mail: foodservice@stoelting.com  
www.stoeltingfoodservice.com

ISO 9001:2008 Registered

Certified, Listed and/or Recognized by:



STMF-109 5/11